

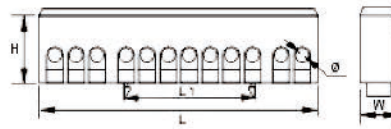


# Insulated busbar terminal

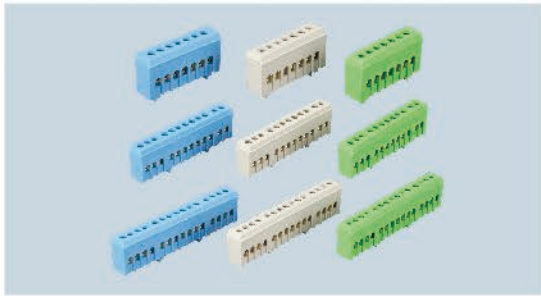


Item no.	Spec. w x h -hole	L1	L2	H	W	Φ	screw size	Plastic setting
		mm						
LK 032-01	6x9-7	53.0	35.0	26.3	13.0	5.2	M5.0	PA
LK 032-02	6x9-12	88.0	35.0	26.3	13.0	5.2	M5.0	PA
LK 032-03	6x9-15	108.0	35.0	26.3	13.0	5.2	M5.0	PA

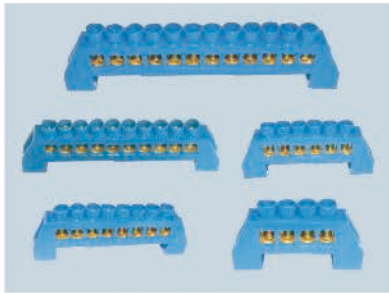



There are 8x12 copper rows in insulating crust

- D-8x12/12 Potential**
- D-8x12/10 Potential**
- D-8x12/8 Potential**
- D-8x12/6 Potential**
- D-8x12/4 Potential**

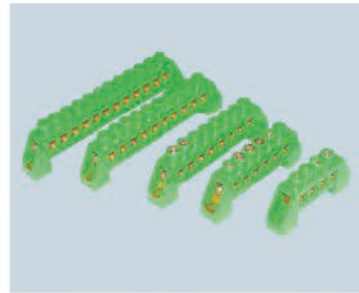


G-8x12 copper rows in insulating crust with earthing in one end.

- G-8x12/12 Potential**
- G-8x12/10 Potential**
- G-8x12/8 Potential**
- G-8x12/6 Potential**
- G-8x12/4 Potential**

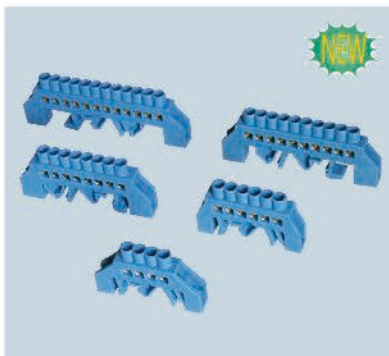


Item no.	Spec. w x h -hole	L1	L2	H	W	Φ	screw size	Plastic setting
		mm						
LK 033-01	6x9-4	57.5	34	34.5	10.5	5.0	M4	PA
LK 033-02	6x9-6	57.7	46.7	34.5	10.5	5.0	M4	PA
LK 033-03	6x9-8	78.5	60	34.5	10.5	5.0	M4	PA
LK 033-04	6x9-10	89	72.8	34.5	10.5	5.0	M4	PA
LK 033-05	6x9-12	102	85.7	34.5	10.5	5.0	M4	PA
LK 033-06	8x12-4	77.5	40.6	38.6	12.6	7.0	M5	PA
LK 033-07	8x12-6	77.5	57.3	38.6	12.6	7.0	M5	PA
LK 033-08	8x12-8	94.3	74.4	38.6	12.6	7.0	M5	PA
LK 033-09	8x12-10	111.0	91	38.6	12.6	7.0	M5	PA
LK 033-10	8x12-12	128.4	108.6	38.6	12.6	7.0	M5	PA
LK 033-11	8x12-14	145.8	135.6	38.6	12.6	7.0	M5	PA

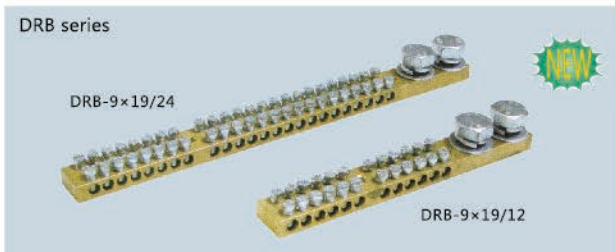

## Double row brass terminal series

Model No.	Way	Brass specification (mm)	Rated current (A)	Dimension (mm)	Screw no.s	Installation hole Distance(mm)
DRB-9x19/6	6	9x19	180A	102x45x45	2 x M10 12 x M5	50 (M5)
DRB-9x19/12	12	9x19	180A	144x45x45	2 x M10 24 x M5	50 (M5)
DRB-9x19/18	18	9x19	180A	187x45x45	2 x M10 36 x M5	120 (M5)
DRB-9x19/24	24	9x19	180A	230x45x45	2 x M10 48 x M5	120 (M5)
DRB-9x19/36	36	9x19	180A	315x45x45	2 x M10 72 x M5	120 (M5)

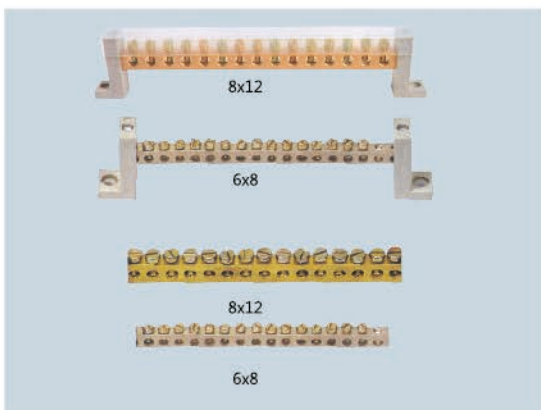

Busbar plated or not for Imeter.

